

全长	吃入部+完全螺纹部的长度	螺纹部长	颈下长	柄部长	柄径	四角部宽	四角部长
L	ℓt	ℓ	ℓn	ℓs	Ds	K	ℓk

SP LH




螺旋丝攻 左牙用
样式特长



被削材和推荐的攻牙速度

中碳钢
Medium carbon steels
5~10
(m/min)

※详细图解说明请参阅P24

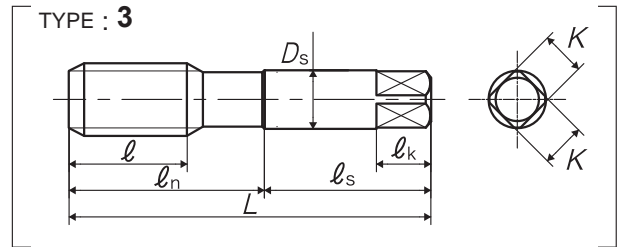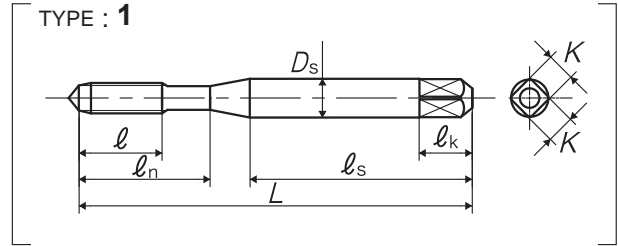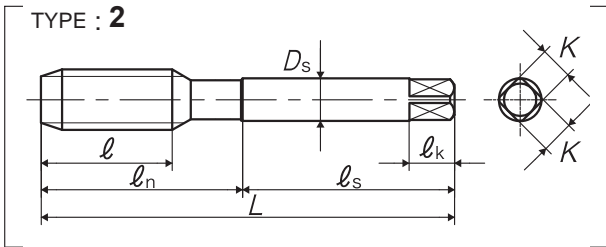

品区: 1C

尺寸	等级	产品编号	吃入部	L (mm)	ℓ (mm)	ℓn (mm)	ℓs (mm)	Ds (mm)	K (mm)	ℓk (mm)	沟数	构型	库存
公制螺纹用													
M2×0.4	P1	SPP2.0E--L	2.5P	42	7.2	12	27	3	2.5	5	2	1	△
M2.3×0.4	P1	SPP2.3E--L	2.5P	42	7.2	12	27	3	2.5	5	2	1	△
M2.5×0.45	P1	SPP2.5F--L	2.5P	46	8.1	14	29	3	2.5	5	2	1	△
M2.6×0.45	P1	SPP2.6F--L	2.5P	46	8.1	14	29	3	2.5	5	2	1	△
M3×0.5	P1	SPP3.0G--L	2.5P	46	9	14	26	4	3.2	6	3	1	○
M4×0.7	P2	SPQ4.0I--L	2.5P	52	11	17	29	5	4	7	3	1	○
M5×0.8	P2	SPQ5.0K--L	2.5P	60	13	22	33	5.5	4.5	7	3	1	○
M6×1	P2	SPQ6.0M--L	2.5P	62	15	26	33	6	4.5	7	3	1	○
M7×1	P2	SPQ7.0M--L	2.5P	70	19	-	36	6.2	5	8	3	2	△
M8×1.25	P2	SPQ8.0N--L	2.5P	70	19	-	36	6.2	5	8	3	2	○
M8×1	P2	SPQ8.0M--L	2.5P	70	19	-	36	6.2	5	8	3	2	△
M10×1.5	P2	SPQ0100--L	2.5P	75	23	-	38	7	5.5	8	3	2	○
M10×1.25	P2	SPQ010N--L	2.5P	75	23	-	38	7	5.5	8	3	2	○
M10×1	P2	SPQ010M--L	2.5P	75	23	-	38	7	5.5	8	3	2	△
M12×1.75	P2	SPQ012P--L	2.5P	82	26	-	42	8.5	6.5	9	3	2	○
M12×1.5	P2	SPQ0120--L	2.5P	82	26	-	42	8.5	6.5	9	3	2	△
M12×1.25	P2	SPQ012N--L	2.5P	82	26	-	42	8.5	6.5	9	3	2	△
M12×1	P2	SPQ012M--L	2.5P	82	26	-	42	8.5	6.5	9	3	2	△
M14×2	P2	SPQ014Q--L	2.5P	88	26	-	45	10.5	8	11	3	2	△
M14×1.5	P2	SPQ0140--L	2.5P	88	26	-	45	10.5	8	11	3	2	△
M16×2	P2	SPQ016Q--L	2.5P	95	26	-	48	12.5	10	13	3	2	○
M16×1.5	P2	SPQ0160--L	2.5P	95	26	-	48	12.5	10	13	3	2	△
M18×2.5	P3	SPR018R--L	2.5P	100	33	-	51	14	11	14	4	2	△

螺旋丝攻
(盲孔用)

螺旋型
先端丝攻
(通孔用)

先端丝攻
(通孔用)

直沟丝攻

超硬丝攻

挤压丝攻

特殊螺纹丝攻
简易检查工具

管用丝攻

螺纹铣刀

圆板牙

中心钻

孔面工具

◎=流通品 ○=准流通品 △=特定流通品 (接单生产品)
※为求改良·有无预告即改变产品样式之情形·

Think threads with
YAMAWA

JIS
SP-20

45

螺旋丝攻系列(盲孔用)

SP LH 螺旋丝攻 左牙用

螺旋丝攻
(盲孔用)

螺旋丝攻
(通孔用)

先端丝攻
(通孔用)

直沟丝攻

超硬丝攻

挤压丝攻

特殊螺纹丝攻
筒易检查工具

管用丝攻

螺纹铣刀

圆板牙

中心钻

孔面工具

尺寸	等级	产品编号	吃入部	L (mm)	ℓ (mm)	ℓn (mm)	ℓs (mm)	Ds (mm)	K (mm)	ℓk (mm)	沟数	构型	库存
M18×1.5	P2	SPQ0180--L	2.5P	100	33	-	51	14	11	14	4	2	△
M20×2.5	P3	SPR020R--L	2.5P	105	33	-	50	15	12	15	4	3	○
M20×1.5	P3	SPR0200--L	2.5P	105	33	-	50	15	12	15	4	3	△
M22×2.5	P3	SPR022R--L	2.5P	115	33	-	55	17	13	16	4	3	△
M22×1.5	P3	SPR0220--L	2.5P	115	33	-	55	17	13	16	4	3	△
M24×3	P3	SPR024S--L	2.5P	120	39	-	55	19	15	18	4	3	○
M24×1.5	P3	SPR0240--L	2.5P	120	39	-	55	19	15	18	4	3	△
M27×3	P3	SPR027S--L	2.5P	130	39	-	60	20	15	18	4	3	△
M30×3.5	P4	SPS030T--L	2.5P	135	46	-	62	23	17	20	4	3	△
M30×2	P3	SPR030Q--L	2.5P	135	46	-	62	23	17	20	4	3	△
M30×1.5	P3	SPR0300--L	2.5P	135	46	-	62	23	17	20	4	3	△
美制螺纹用													
尺寸	等级	产品编号	吃入部	L (mm)	ℓ (mm)	ℓn (mm)	ℓs (mm)	Ds (mm)	K (mm)	ℓk (mm)	沟数	构型	库存
1/4-20UNC	P2	SPQU04N--L	2.5P	62	15	26	33	6	4.5	7	3	1	△
1/4-28UNF	P2	SPQU04K--L	2.5P	62	15	26	33	6	4.5	7	3	1	△
5/16-18UNC	P2	SPQU050--L	2.5P	70	19	-	36	6.2	5	8	3	2	△
5/16-24UNF	P2	SPQU05M--L	2.5P	70	19	-	36	6.2	5	8	3	2	△
3/8-16UNC	P2	SPQU06P--L	2.5P	75	23	-	38	7	5.5	8	3	2	△
3/8-24UNF	P2	SPQU06M--L	2.5P	75	23	-	38	7	5.5	8	3	2	△
7/16-14UNC	P3	SPRU07Q--L	2.5P	82	26	-	42	8.5	6.5	9	3	2	△
7/16-20UNF	P2	SPQU07N--L	2.5P	82	26	-	42	8.5	6.5	9	3	2	△
1/2-13UNC	P3	SPRU08R--L	2.5P	88	26	-	45	10.5	8	11	3	2	△
1/2-20UNF	P2	SPQU08N--L	2.5P	88	26	-	45	10.5	8	11	3	2	△
英制螺纹用													
尺寸	等级	产品编号	吃入部	L (mm)	ℓ (mm)	ℓn (mm)	ℓs (mm)	Ds (mm)	K (mm)	ℓk (mm)	沟数	构型	库存
1/4W20	P2	SPQW04N--L	2.5P	62	15	26	33	6	4.5	7	3	1	△
5/16W18	P2	SPQW050--L	2.5P	70	19	-	36	6.2	5	8	3	2	△
3/8W16	P2	SPQW06P--L	2.5P	75	23	-	38	7	5.5	8	3	2	△
7/16W14	P3	SPRW07Q--L	2.5P	82	26	-	42	8.5	6.5	9	3	2	△
1/2W12	P3	SPRW08S--L	2.5P	88	26	-	45	10.5	8	11	3	2	△
5/8W11	P3	SPRW10U--L	2.5P	95	26	-	48	12.5	10	13	3	2	△
3/4W10	P3	SPRW12V--L	2.5P	105	33	-	50	15	12	15	4	3	△