

## LS-PT



长柄斜行管用丝攻  
样式特长



被削材和推荐的攻牙速度



※详细图解说明请参阅P24

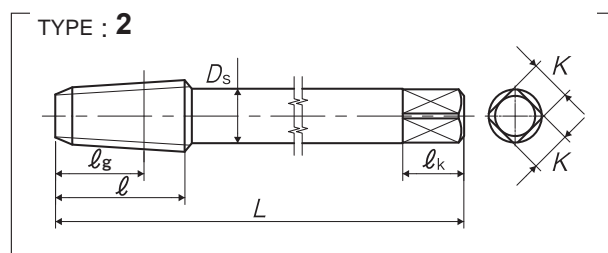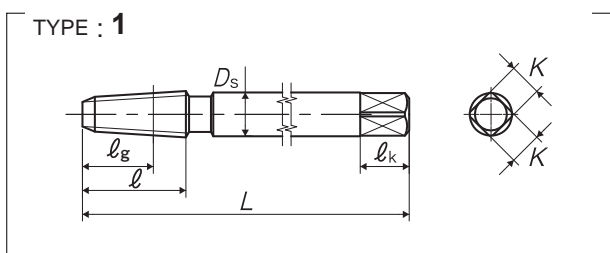

品区: 1G

| 尺寸          | 等级 | 产品编号      | 吃入部  | 大径的基准值 (mm) | L (mm) | ℓ (mm) | ℓg (mm) | Ds (mm) | K (mm) | ℓk (mm) | 沟数 | 构型 | 库存 |
|-------------|----|-----------|------|-------------|--------|--------|---------|---------|--------|---------|----|----|----|
| 管用          |    |           |      |             |        |        |         |         |        |         |    |    |    |
| PT 1/16-28  | II | L10T01K-8 | 2.5P | 7.723       | 100    | 19     | 13      | 8       | 6      | 9       | 4  | 1  | △  |
| PT 1/8-28   | II | L10T02K   | 2.5P | 9.728       | 100    | 19     | 13      | 8       | 6      | 9       | 4  | 2  | ◎  |
|             |    | L15T02K   |      |             | 150    |        |         |         |        |         |    |    | △  |
|             |    | L20T02K   |      |             | 200    |        |         |         |        |         |    |    | △  |
| PT 1/4-19   | II | L10T04-   | 2.5P | 13.157      | 100    | 28     | 21      | 11      | 9      | 12      | 4  | 2  | ◎  |
|             |    | L15T04-   |      |             | 150    |        |         |         |        |         |    |    | △  |
|             |    | L20T04-   |      |             | 200    |        |         |         |        |         |    |    | △  |
| PT 3/8-19   | II | L10T06-   | 2.5P | 16.662      | 100    | 28     | 21      | 14      | 11     | 14      | 4  | 2  | ◎  |
|             |    | L12T06-   |      |             | 120    |        |         |         |        |         |    |    | △  |
|             |    | L15T06-   |      |             | 150    |        |         |         |        |         |    |    | ◎  |
|             |    | L20T06-   |      |             | 200    |        |         |         |        |         |    |    | △  |
| PT 1/2-14   | II | L15T08Q   | 2.5P | 20.955      | 150    | 35     | 25      | 18      | 14     | 17      | 4  | 2  | ○  |
|             |    | L20T08Q   |      |             | 200    |        |         |         |        |         |    |    | △  |
| PT 3/4-14   | II | L15T12Q   | 2.5P | 26.441      | 150    | 35     | 25      | 23      | 17     | 20      | 4  | 2  | ○  |
|             |    | L20T12Q   |      |             | 200    |        |         |         |        |         |    |    | △  |
| PT 1 -11    | II | L15T16U   | 2.5P | 33.249      | 150    | 45     | 32      | 26      | 21     | 24      | 5  | 2  | ○  |
|             |    | L20T16U   |      |             | 200    |        |         |         |        |         |    |    | △  |
| PT 1 1/4-11 | II | -         | 2.5P | 41.910      | 200    | 45     | 32      | 32      | 26     | 30      | 5  | 2  | △  |
| PT 1 1/2-11 | II | -         | 2.5P | 47.803      | 200    | 45     | 32      | 38      | 29     | 32      | 6  | 2  | △  |

螺旋丝攻  
(盲孔用)

螺旋型  
先端丝攻  
(通孔用)

先端丝攻  
(通孔用)

直沟丝攻

超硬丝攻

挤压丝攻

特殊螺纹  
筒易检查工具

管用丝攻

螺纹铣刀

圆板牙

中心钻

孔面工具